


# TA2P

series

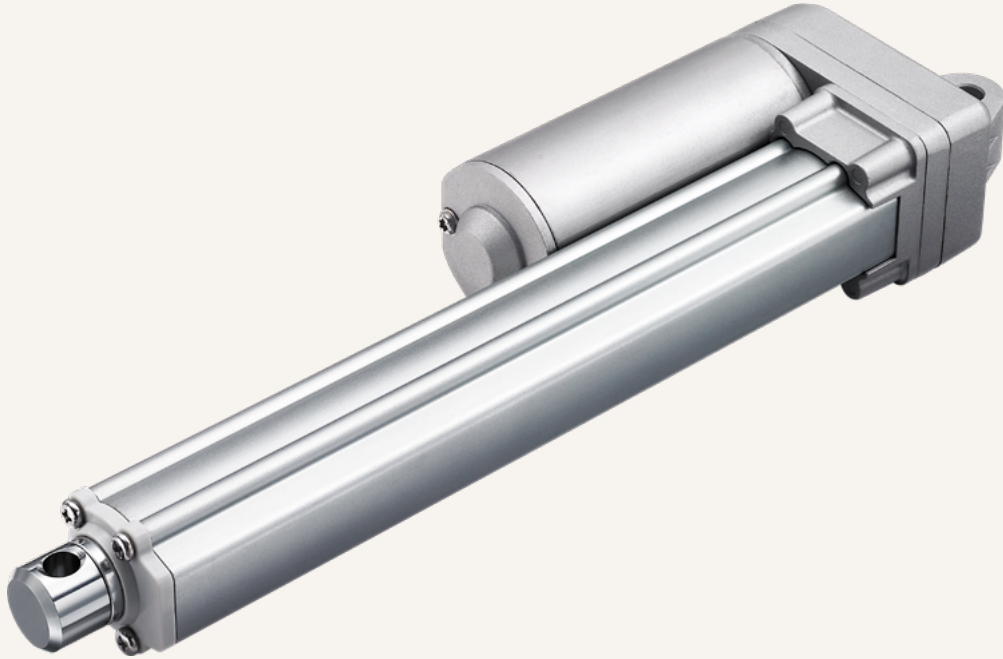

## Product Segments

- **Industrial Motion**


Both the TA2 and the TA2P are compact, robust, and capable of performing well in certain outdoor environments. A more powerful motor makes the TA2P capable of handling load ratings up to 3500N (787 pounds) while retaining its compact size. In addition to the high power motor, the TA2P linear actuator is available with multiple choices for feedback sensors.

### General Features


Max. load	3,500N (push); 2,000N (pull)
Max. speed at max. load	2.4mm/s
Max. speed at no load	56.5mm/s
Retracted length	≥ Stroke + 108mm (with Hall sensors or without output signals)
IP rating	IP66D
Certificate	UL73
Stroke	20~1000mm
Output Signals	POT, Reed, Hall sensors
Voltage	12 / 24 / 36V DC; 12 / 24V DC (PTC)
Color	Silver
Operational temperature range	-25°C ~ +65°C
Operational temperature range at full performance	+5°C ~ +45°C

**Drawing**

Dimensions  
without Output Signal  
or with Hall Sensors  
(mm)

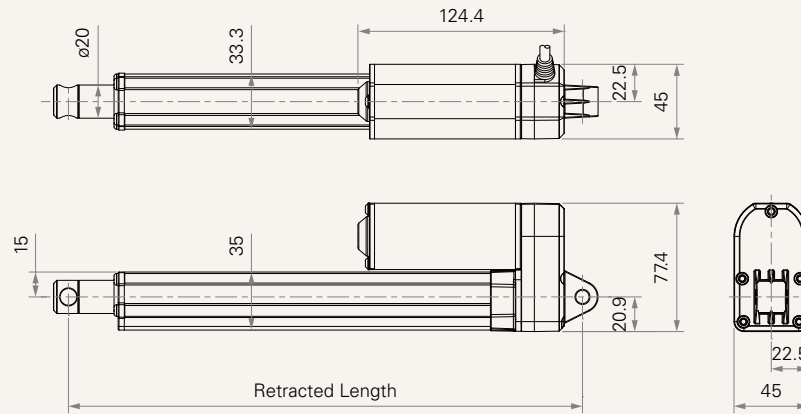

Dimensions  
with POT  
or Reed Sensor  
(mm)

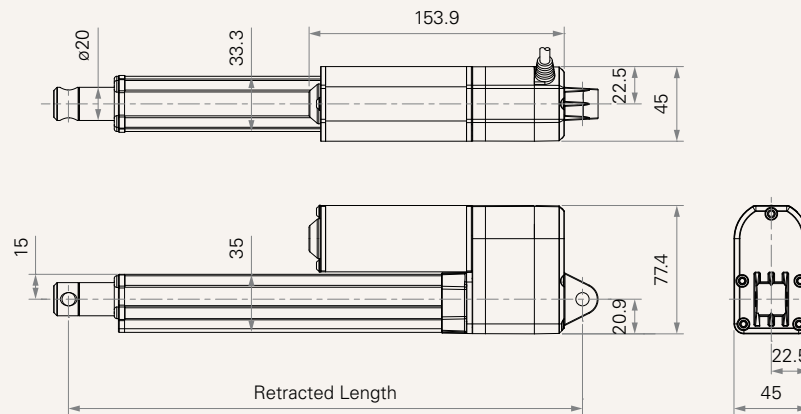

## Load and Speed

CODE	Load (N)		Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push	Pull		No Load 24V DC	With Load 24V DC	No Load 24V DC	With Load 24V DC
<b>Motor Speed (5200RPM, duty cycle 25%)</b>							
<b>A</b>	250	250	250	1.2	2.3	43.0	36.0
<b>B</b>	500	500	500	1.1	2.5	25.8	23.0
<b>C</b>	1000	1000	1000	1.1	3.0	14.0	11.8
<b>D</b>	1500	1500	1500	1.0	2.8	9.0	8.0
<b>E</b>	2000	2000	2000	1.0	2.8	7.1	6.2
<b>Motor Speed (6600RPM, duty cycle 25%)</b>							
<b>F</b>	250	250	250	1.6	3.0	56.5	45.0
<b>G</b>	500	500	500	1.5	3.0	32.5	28.5
<b>H</b>	1000	1000	1000	1.5	3.0	16.5	14.3
<b>K</b>	1500	1500	1500	1.3	3.0	11.1	10.0
<b>L</b>	2000	2000	2000	1.3	3.0	8.8	7.7
<b>Motor Speed (3800RPM, duty cycle 25%)</b>							
<b>S</b>	3500	2000	3500	0.8	2.8	3.2	2.4
<b>Motor Speed (2200RPM, duty cycle 25%)</b>							
<b>T</b>	2000	2000	2000	0.3	0.9	3.2	2.3

## Note


- 1 Please refer to the approved drawing for the final authentic value.
- 2 This self-locking force level is reached only when a short circuit is applied on the terminals of the motor. All the TiMOTION control boxes have this feature built-in.
- 6 The current & speed in table are tested with 24V DC motor. With a 12V DC motor, the current is approximately twice the current measured in 24V DC. With a 36V DC motor, the current is approximately two-thirds the current measured in 24V DC. Speed will be similar for all the voltages.
- 7 The current & speed in table are tested when the actuator is extending under push load.
- 8 The current & speed in table and diagram are tested with a stable 24V DC power supply.
- 9 Standard stroke: Min.  $\geq 20$ mm, Max. please refer to below table.

CODE	Load (N)	Max Stroke (mm)
<b>A, F</b>	$\leq 250$	1000
<b>B, G</b>	$\leq 750$	800
<b>C, H</b>	$\leq 1000$	600
<b>D, K</b>	$\leq 1500$	500
<b>E, L, T</b>	$\leq 2000$	450
<b>S</b>	$\leq 3500$	300


**Performance Data (24V DC)**

Motor Speed (5200RPM, duty cycle 25%)

Speed vs. Load

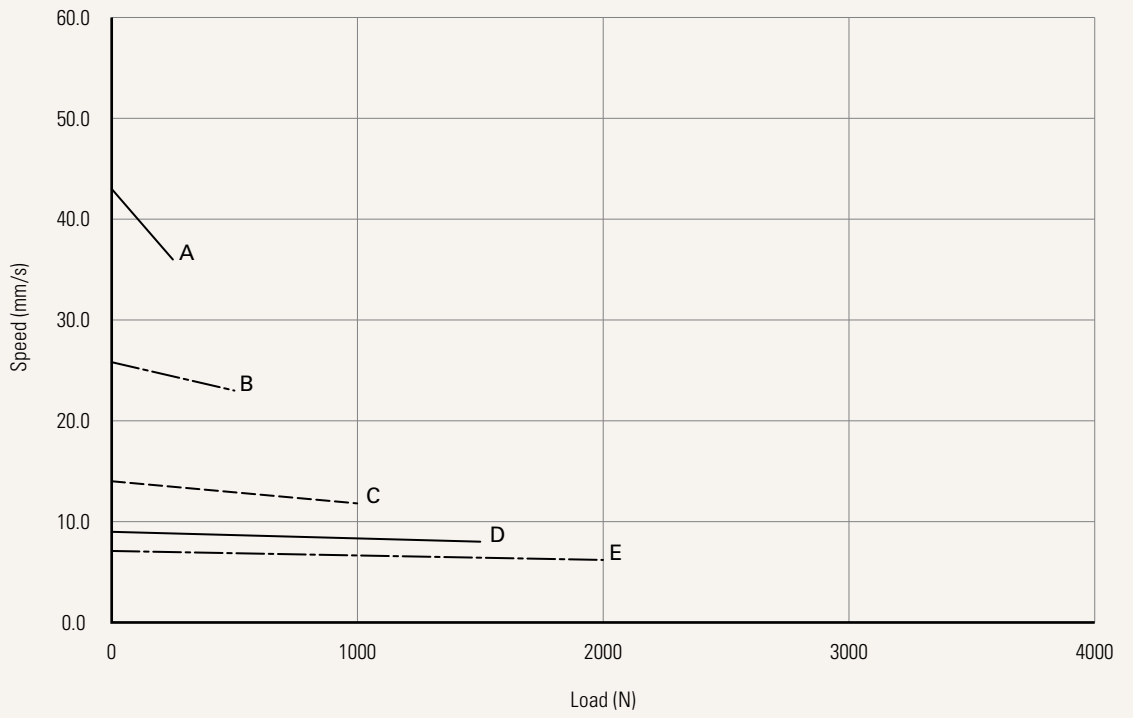

Current vs. Load

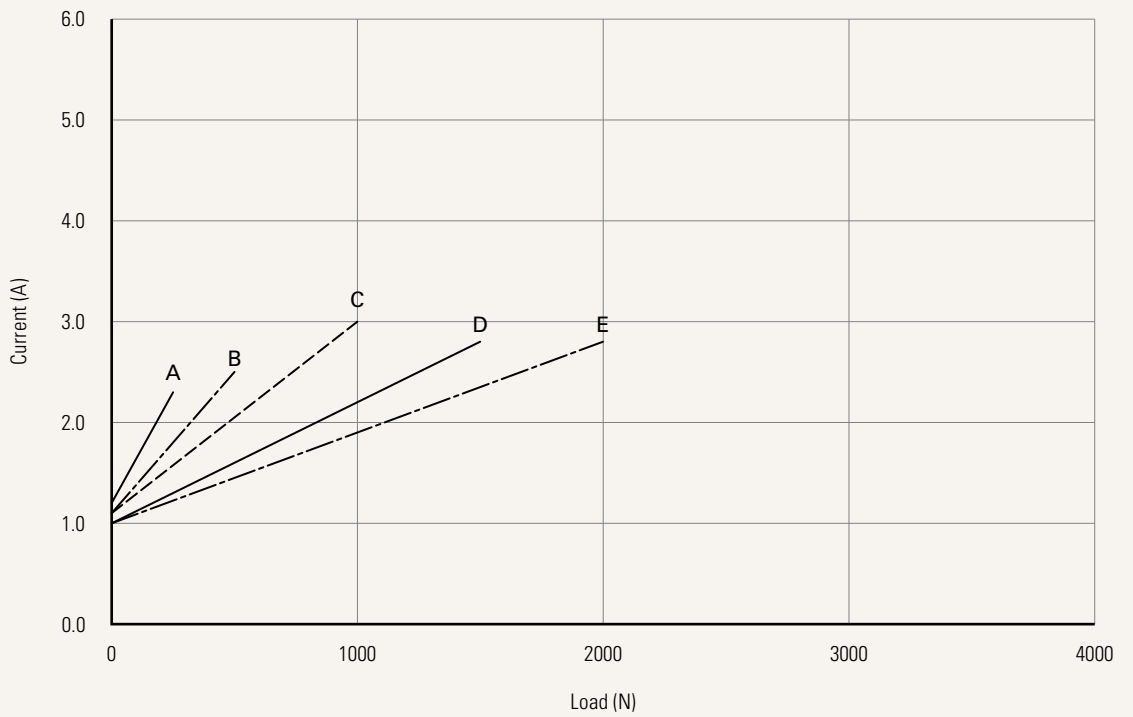


**Note**

1 The performance data in the curve charts shows theoretical value.


Performance Data (24V DC)

Motor Speed (6600RPM, duty cycle 25%)

Speed vs. Load

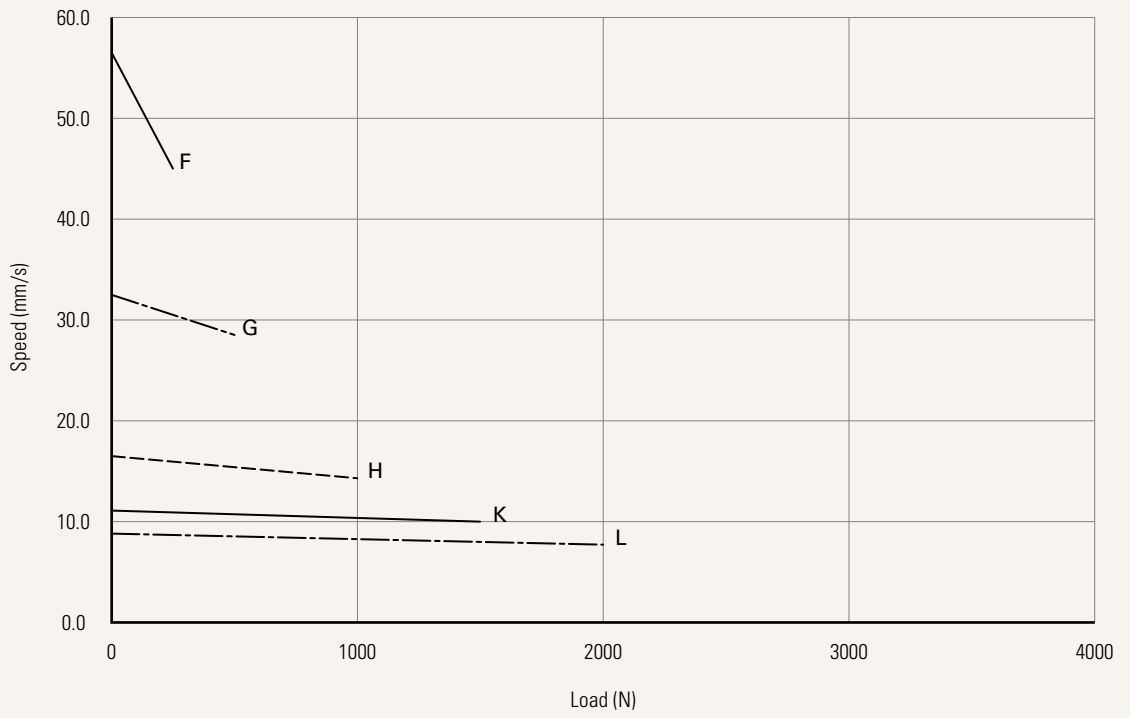

Current vs. Load

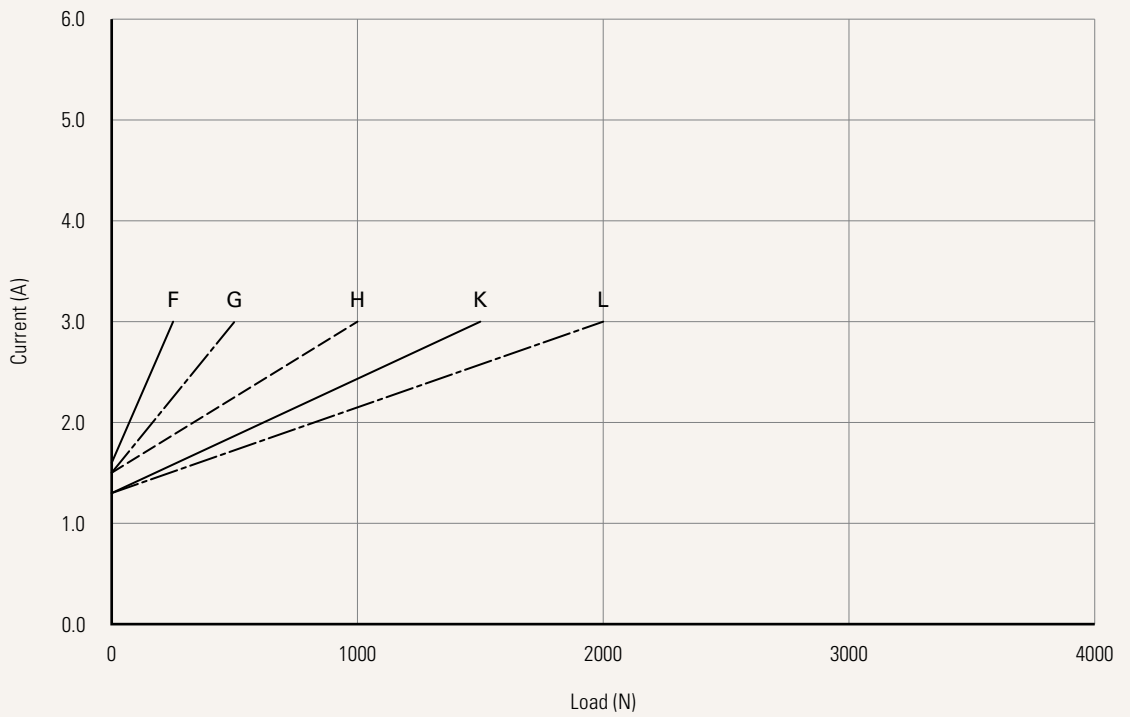


Note

1 The performance data in the curve charts shows theoretical value.


**Performance Data (24V DC)**

Motor Speed (3800RPM, duty cycle 25%)

Speed vs. Load

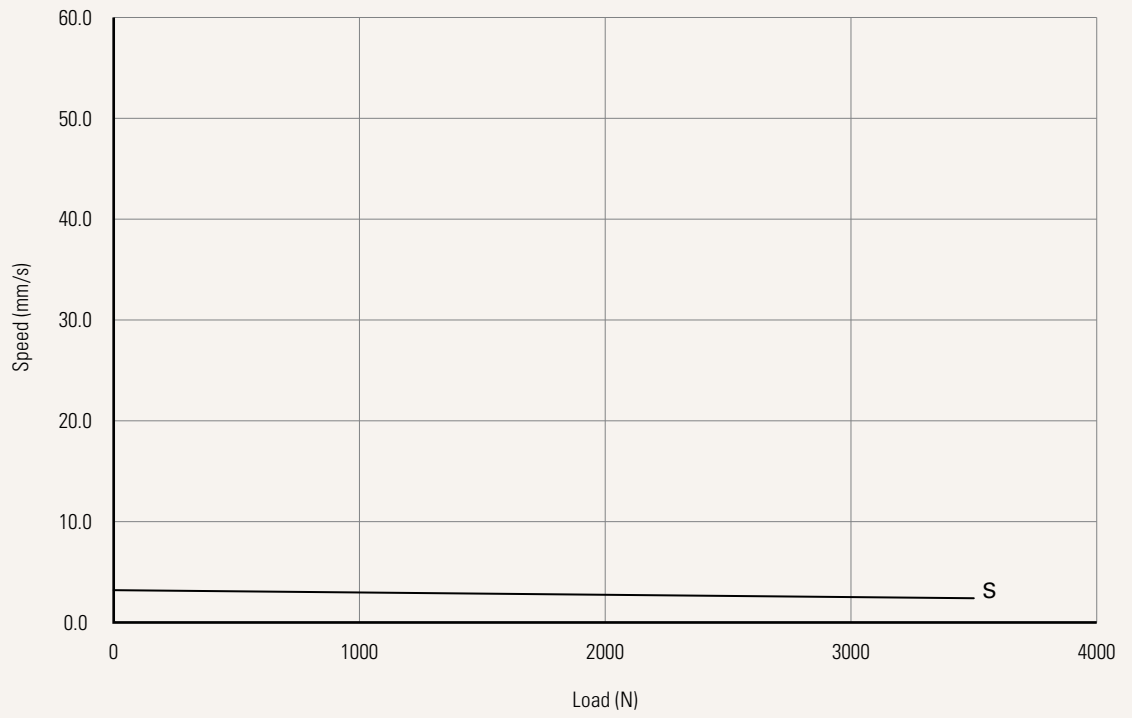

Current vs. Load

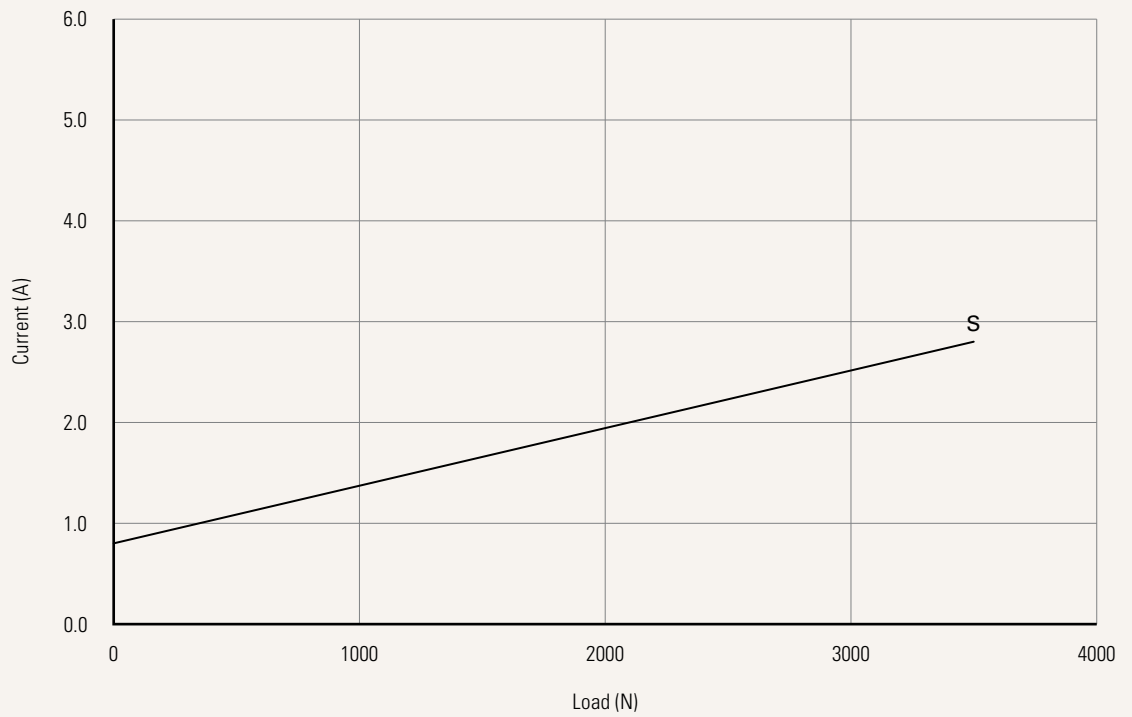


**Note**

1 The performance data in the curve charts shows theoretical value.


**Performance Data (24V DC)**

Motor Speed (2200RPM, duty cycle 25%)

Speed vs. Load

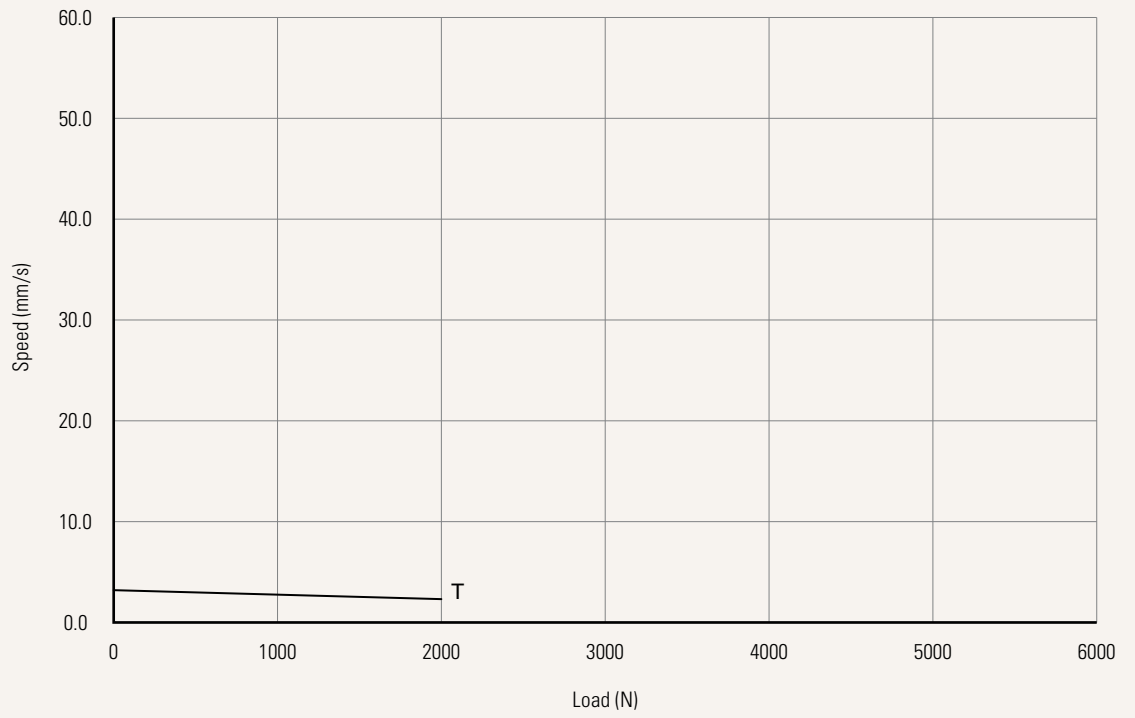

Current vs. Load

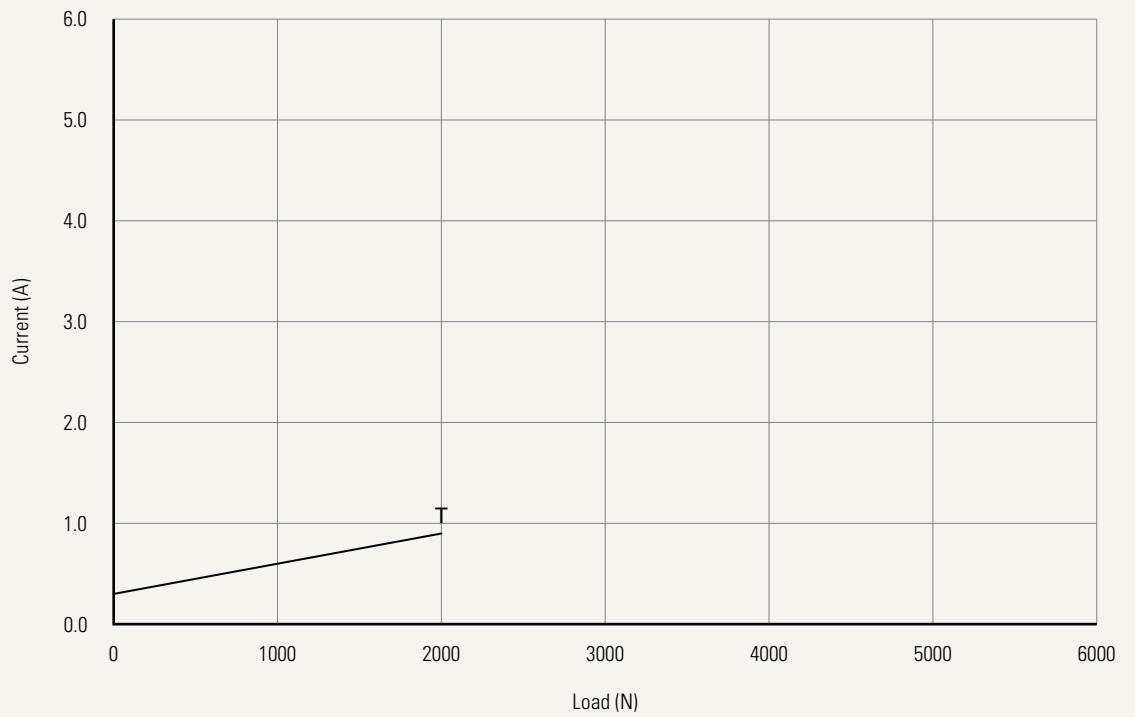

**Note**

1 The performance data in the curve charts shows theoretical value.

<b>Voltage</b> <a href="#">See page 10</a>	1 = 12V DC 2 = 24V DC	3 = 36V DC 5 = 24V DC, PTC	6 = 12V DC, PTC	
<b>Load and Speed</b>	<a href="#">See page 3</a>			
<b>Stroke (mm)</b>	<a href="#">See page 3</a>			
<b>Retracted Length (mm)</b>	<a href="#">See page 9</a>			
<b>Rear Attachment (mm)</b> <a href="#">See page 10</a>	1 = Aluminum casting, hole 6.4, one piece casting with gear box 2 = Aluminum casting, hole 8.0, one piece casting with gear box 3 = Aluminum casting, hole 10.0, one piece casting with gear box	4 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 6.4, one piece casting with gear box 5 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 8.0, one piece casting with gear box 6 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 10.0, one piece casting with gear box		
<b>Front Attachment (mm)</b> <a href="#">See page 11</a>	1 = Aluminum casting, hole 6.4 2 = Aluminum casting, hole 8.0 3 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 10.0	4 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 6.4 5 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 8.0		
<b>Direction of Rear Attachment (Counterclockwise)</b> <a href="#">See page 11</a>	1 = 90°	2 = 0°		
<b>Functions for Limit Switches</b> <a href="#">See page 12</a>	1 = Two switches at full retracted / extended positions to cut current 2 = Two switches at full retracted / extended positions to cut current + third one in between to send signal 3 = Two switches at full retracted / extended positions to send signal 4 = Two switches at full retracted / extended positions to send signal + third one in between to send signal			
<b>Output Signals</b>	0 = Without	1 = POT	3 = Reed sensor	5 = Hall sensor * 2
<b>Connector</b> <a href="#">See page 12</a>	1 = DIN 6P, 90° plug	2 = Tinned leads		
<b>Cable Length (mm)</b>	1 = Straight, 300	2 = Straight, 600	3 = Straight, 1000	
<b>IP Rating</b>	1 = Without	2 = IP54	3 = IP66	6 = IP66D



## Retracted Length (mm)

1. Calculate  $A+B+C = Y$
2. Retracted length needs to  $\geq$  Stroke + Y

A. Attachment		
Front Attachment	Rear Attachment	
	1, 2, 3	4, 5, 6
1, 2	+108	+112
3, 4, 5	+120	+124



B. Load V.S. Stroke		
Stroke (mm)	Load (N)	
	< 3500	= 3500
20~150	-	+5
151~200	+2	+7
201~250	+2	+7
251~300	+2	+7
301~350	+12	+17
351~400	+22	+27
401~450	+32	+37
451~500	+42	+47
501~550	+52	+57
551~600	+62	+67
601~650	+72	+77
651~700	+82	+87
701~750	+92	+97
751~800	+102	+107
801~850	+112	+117
851~900	+122	+127
901~950	+132	+137
951~1000	+142	+147

C. Output Signals	
CODE	
0, 4, 5	-
1, 3	+30

## Voltage

5 = 24V DC, PTC

6 = 12V DC, PTC







## Rear Attachment (mm)

1 = Aluminum casting, hole 6.4, one piece casting with gear box

2 = Aluminum casting, hole 8.0, one piece casting with gear box



3 = Aluminum casting, hole 10.0, one piece casting with gear box

4 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 6.4, one piece casting with gear box




5 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 8.0, one piece casting with gear box

6 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 10.0, one piece casting with gear box




## Front Attachment (mm)


1 = Aluminum casting, hole 6.4




2 = Aluminum casting, hole 8.0




3 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 10.0



4 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 6.4




5 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 8.0




## Direction of Rear Attachment (Counterclockwise)

1 = 90°

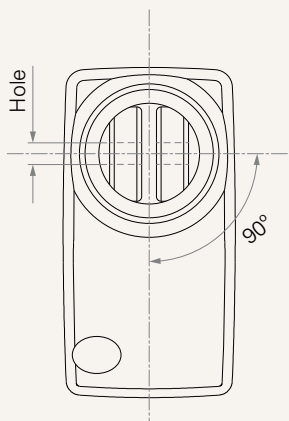

2 = 0°

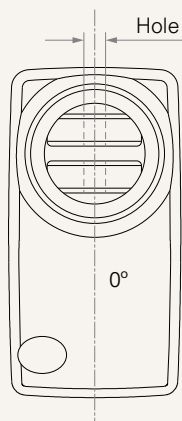


## Functions for Limit Switches

### Wire Definitions

CODE	Pin					
	● 1 (Green)	● 2 (Red)	○ 3 (White)	● 4 (Black)	● 5 (Yellow)	● 6 (Blue)
1	extend (VDC+)	N/A	N/A	N/A	retract (VDC+)	N/A
2	extend (VDC+)	N/A	middle switch pin B	middle switch pin A	retract (VDC+)	N/A
3	extend (VDC+)	common	upper limit switch	N/A	retract (VDC+)	lower limit switch
4	extend (VDC+)	common	upper limit switch	medium limit switch	retract (VDC+)	lower limit switch

### Connector

1 = DIN 6P, 90° plug



2 = Tinned leads



### Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.