

JP5

series



Product Segments

- **Industrial Motion**


TiMOTION's JP5 is an in-line linear actuator specifically designed for use in low-load industrial applications. With a maximum load capacity of 1,500N, it is particularly suitable for products and applications that require a compact installation space. Optional Hall sensors support synchronous operation and provide position feedback. With an IP rating up to IP69K (static), this actuator is well suited for the harshest of environments.

General Features

Max. load	1,500N (push/pull)
Max. speed at max. load	4.5mm/s
Max. speed at no load	12.4mm/s
Retracted length	≥ Stroke + 160mm
IP rating	IP69K (static)
Stroke	25~650mm
Output signals	Hall sensor * 2 (5V input) NPN Hall sensor (5~36V input) * 2
Voltage	12/24V DC; 12/24V DC (PTC)
Operational temperature range	-10/-30°C~+70°C (with/without overcurrent protection PCBA)
Operational temperature range at full performance	+5°C~+45°C
Storage temperature range	-40°C~+85°C

Drawing

Standard Dimensions
(mm)

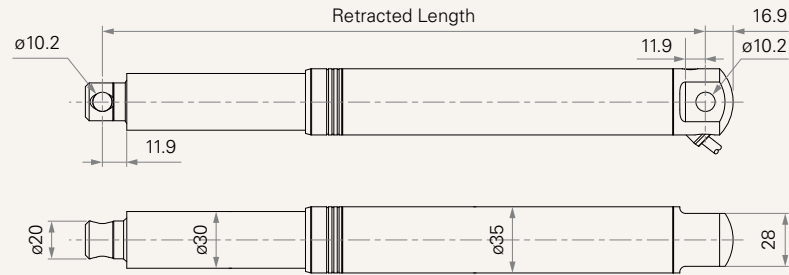

Load and Speed (12V DC)

CODE	Load (N)		Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push	Pull		No Load	With Load	No Load	With Load
Motor Speed (8500RPM, Duty Cycle 10%)							
C	500	500	500	0.5	1.6	12.4	10.0
D	1000	1000	1000	0.5	2.7	9.8	5.8
E	1500	1500	1500	0.5	3.4	7.8	4.5

Load and Speed (24V DC)

CODE	Load (N)		Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push	Pull		No Load	With Load	No Load	With Load
Motor Speed (8500RPM, Duty Cycle 10%)							
C	500	500	500	0.3	0.8	12.4	10.0
D	1000	1000	1000	0.3	1.4	9.8	6.8
E	1500	1500	1500	0.3	1.7	7.8	4.5

Note


- 1 Please refer to the approved drawing for the final authentic value.
- 2 The current & speed in table are tested when the actuator is extending under push load.
- 3 The current & speed in table and diagram are tested with a stable 24V DC power supply.
- 4 Without load, noise level ≤ 68 dB(A) (by TiMOTION test standard, ambient noise level ≤ 36 dB(A))
- 5 Standard stroke: Min. 25mm, Max. please refer to the table below.
- 6 Tolerance: fully extended length & retracted length ± 3 mm.

CODE	Load (N)	Max Stroke (mm)
C	≤ 500	650
D	≤ 1000	600
E	≤ 1500	500


Performance Data (12V DC Motor)

Motor Speed (8500RPM)

Speed vs. Load

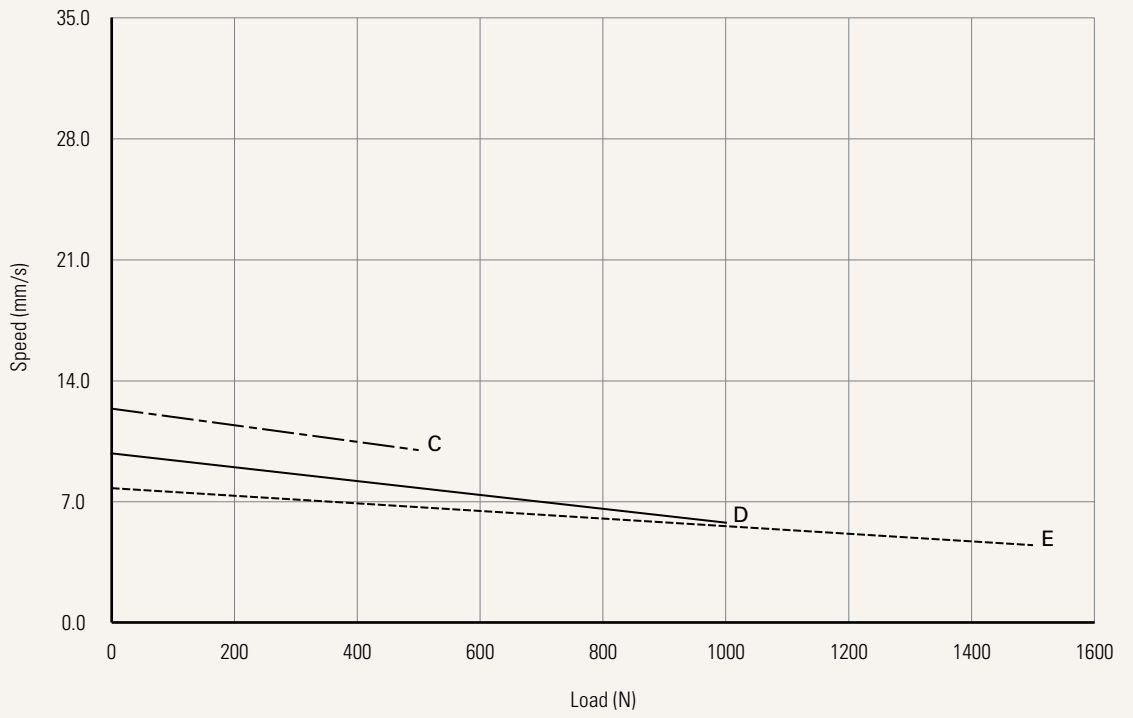


Current vs. Load

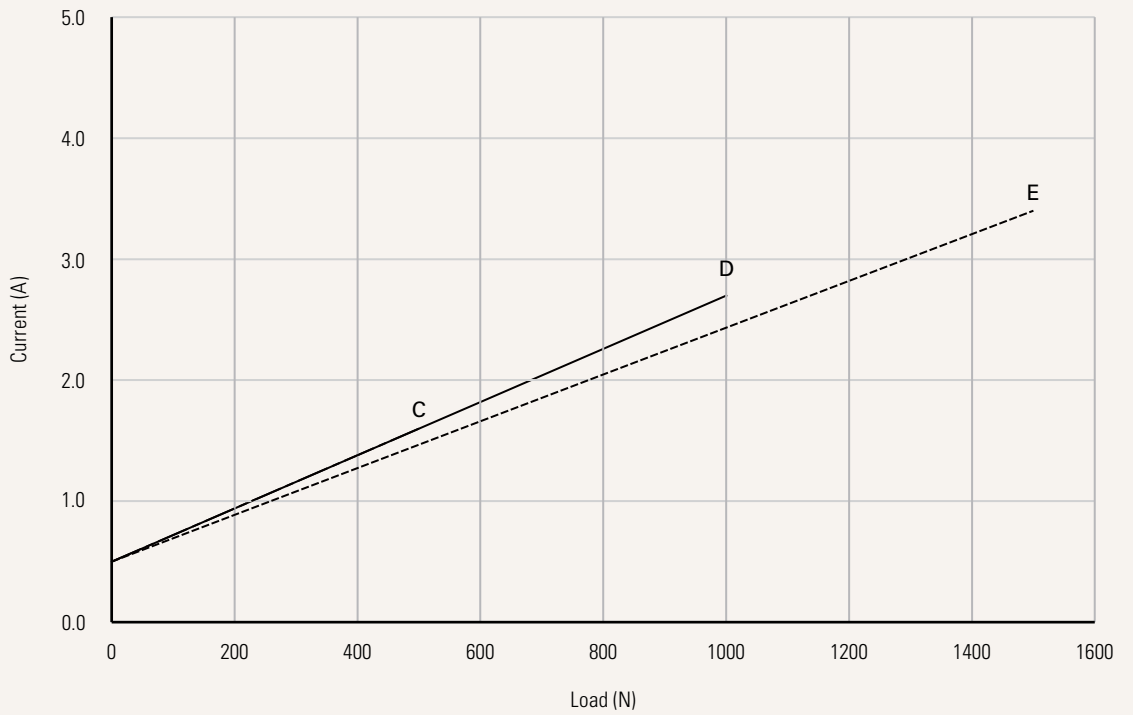


Performance Data (24V DC Motor)

Motor Speed (8500RPM)

Speed vs. Load

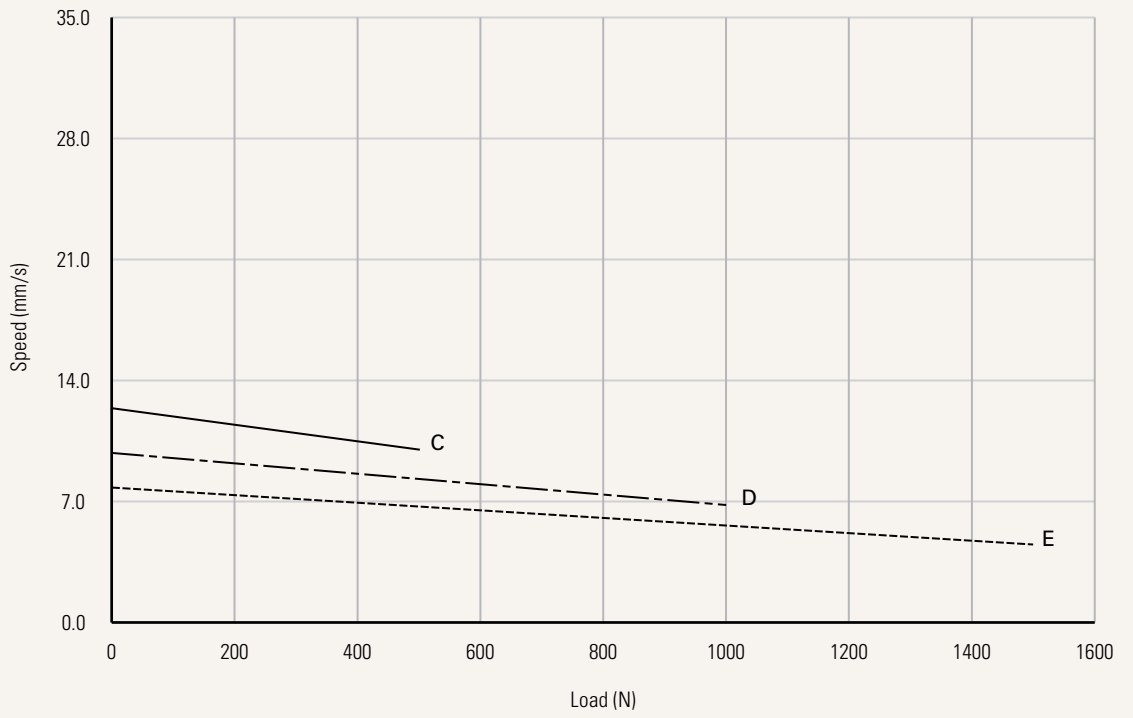

Current vs. Load

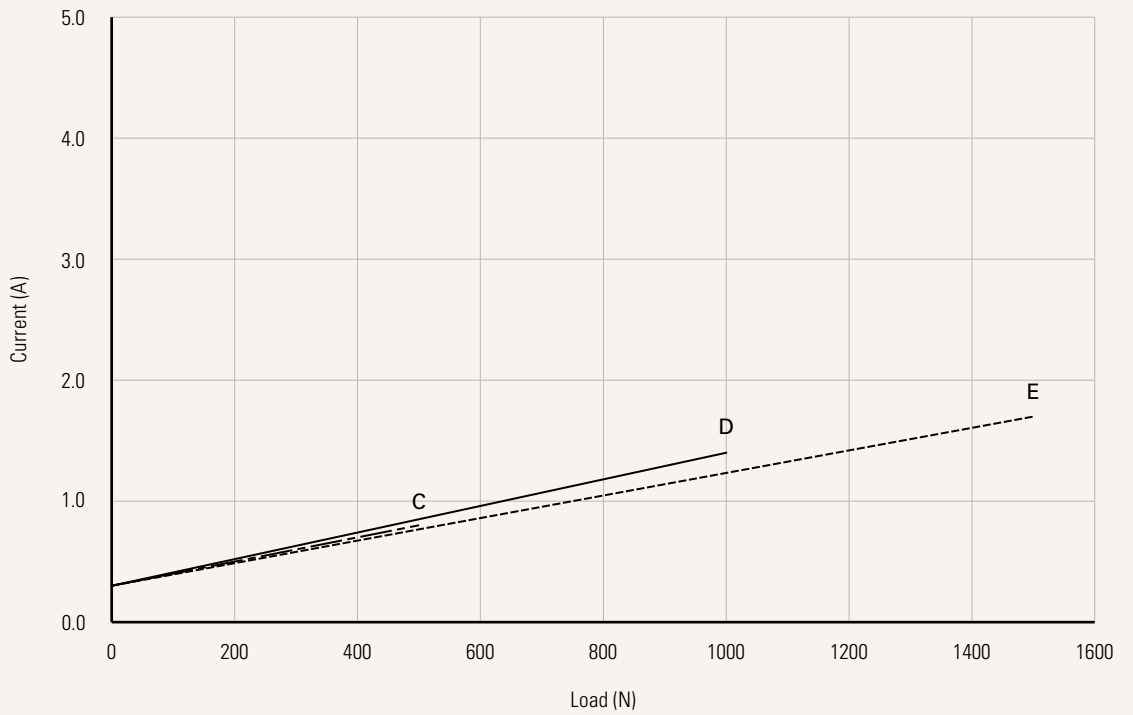

Type	N = Normal			
Voltage	1 = 12V DC	2 = 24V DC	5 = 24V DC, PTC	6 = 12V DC, PTC
Load and Speed	See page 2			
Stroke (mm)	See page 2			
Retracted Length (mm)	See page 6			
Rear Attachment (mm) See page 7	1 = Aluminum, slotless, hole 8.2 2 = Aluminum, slotless, hole 10.2 3 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 8.2	4 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 10.2 5 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 8.2 6 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 10.2		
Front Attachment (mm) See page 7	1 = Aluminum, slotless, hole 8.2 2 = Aluminum, slotless, hole 10.2 3 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 8.2	4 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 10.2 5 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 8.2 6 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 10.2		
Overcurrent Protection PCBA	0 = Without PCBA	P = With PCBA		
Output Signal See page 8	0 = Without 5 = Hall sensor * 2	N = NPN Hall sensor (5~36V input) * 2		
IP Rating / Application Scenarios	6 = IP66M	7 = IP68	8 = IP69K	
Load Type	T = Push	P = Pull		
Connector (mm) See page 8	01 = Tinned leads	0S = AMP SUPERSEAL 1.5, (Female Connector with Male Terminal Pins)		
Cable Length (mm)	1000 = 1000	2000 = 2000	3000 = 3000	5000 = 5000
Alternative	N = Normal			
Packaging (mm²)	0 = Sample packaging C = Standard package, US fumigated pallet (1219*1016) 1 = Standard package, EU fumigated pallet (1200*800) E = Standard package, US plywood pallet (1219*1016) 5 = Standard package, EU plywood pallet (1200*800)			

Retracted Length (mm)

1. Calculate $A+B = Y$
2. Retracted length needs to \geq Stroke + Y

A.


Overcurrent Protection PCBA		#0, Without Overcurrent PCBA			#5 or #N, With Signal Output			#P, With Overcurrent PCBA		
Output signal	Front Attach.	#0, Without Signal Output			#5 or #N, With Signal Output			#0 or #5 or #N, All Output Signal Opt.		
		Rear Attach.								
		1, 2	3, 4	5, 6	1, 2	3, 4	5, 6	1, 2	3, 4	5, 6
1, 2		+160	+169	+173	+181	+188	+192	+246	+253	+257
3, 4		+168	+177	+183	+189	+196	+200	+254	+261	+265
5, 6		+172	+181	+185	+193	+200	+204	+258	+265	+269

B.


Stroke (mm)	Load & Speed (N)	
	C, D	E
25~150	-	+6
151~200	-	+6
201~250	+10	+16
251~300	+20	+26
301~350	+30	+36
351~400	+40	+46
401~450	+50	+56
451~500	+60	+66
501~550	+70	+76
551~600	+80	+86
601~650	+90	+96
651~700	+100	+106
701~750	+110	+116
751~800	+120	+126

Rear Attachment (mm)


1 = Aluminum, slotless, hole 8.2

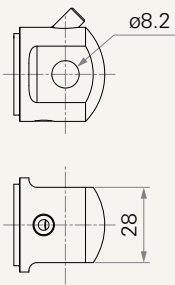


2 = Aluminum, slotless, hole 10.2

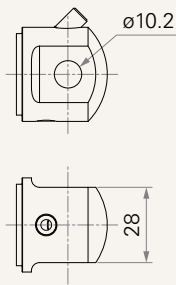


3 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 8.2

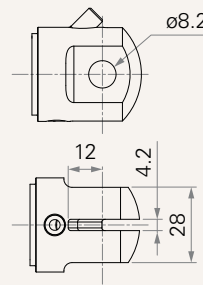


4 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 10.2

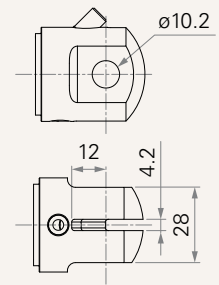

5 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 8.2

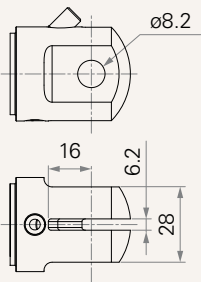


6 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 10.2

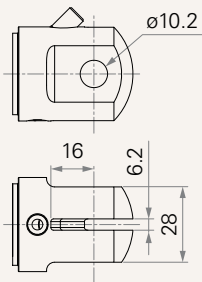


Front Attachment (mm)


1 = Aluminum, slotless, hole 8.2

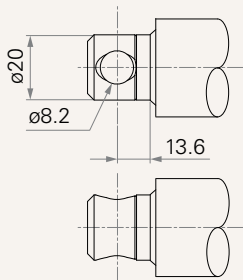


2 = Aluminum, slotless, hole 10.2

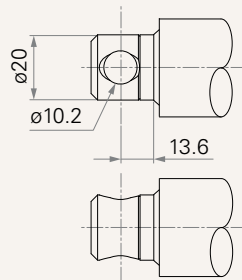


3 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 8.2

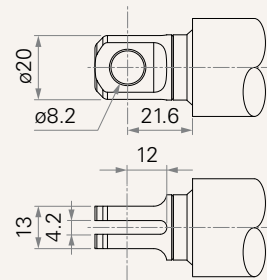


4 = Aluminum, U clevis, slot 4.2, depth 12.0, hole 10.2

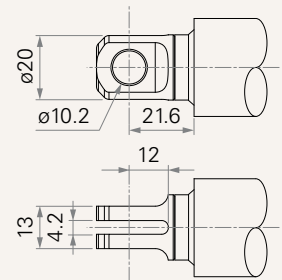

5 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 8.2

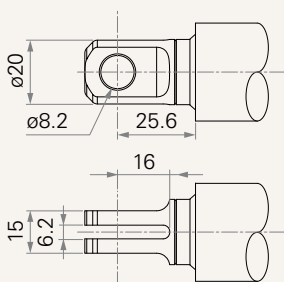



6 = Aluminum, U clevis, slot 6.2, depth 16.0, hole 10.2

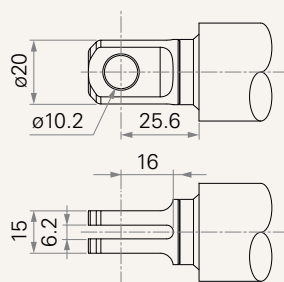

Connector (mm)

01 = Tinned leads

0S = AMP SUPERSEAL 1.5, 2 pins



Wire Definition

Type : Normal, #N

Port	Wire Color	Wire Gauge (AWG)	Output Signal	
			0. Without	5, N. Hall sensor*2
A1	● RD	20	EXT+	EXT+
	● BK	20	RET+	RET+
	● RD	26	-	Vcc+
	○ WH	26	-	S1
	● BU	26	-	S2
	● BK	26	-	Hall-GND

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.