TC15F

series



Product Segments

- **Ergo Motion**

The TC15F control box is specifically designed for a variety of ergonomic height-adjustable applications. Incorporating solid-state circuitry, the TC15F provides seamless and quiet operation, eliminating any relay clicks. Experience instantaneous button responses, delivering an exceptional user experience with smooth, uninterrupted, movements. Elevate your workspace with the TC15F for enhanced operational precision and unparalleled ergonomic performance.

General Features


Number of motors	1~2
Number of controls	1
Max. output	32V DC, 12A
Back-up battery	External battery
Options	Supports built-in t-touch / Bluetooth and external battery
Input Voltage	100~240V AC (SMPS)
Built-in transformer type	SMPS
Plug support	EU, US, AU, UK, or JP
Color	Black
Operational temperature range	+5°C~+45°C

0.1W standby power consumption

Compact design for height adjustable desks

Drawing

Standard Dimensions
(mm)

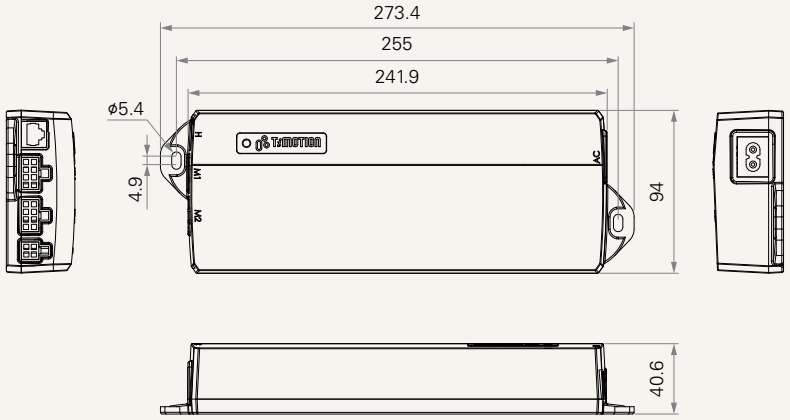

TC15F Ordering Key

TiMOTION

TC15F

Version: 20260706-F

	Transformer	8 = SPM-73Q (32V/2.5A, 0.5W standby power, quick start, 100-240V) L = SPM-73QC (32V/2.5A, 0.1W standby power, quick start, 100-240V) K = SPM-120QC (32V/4.0A + 5V/100mA, 0.1W standby power, quick start, 100-240V)		S = SPM-120Q (32V/4.0A, 0.5W standby power, quick start, 100-240V) W = SPM-150-A (12A, 0.1W stand by, 195-264V) Y = SPM-150-B (12A, 0.1W stand by, 100-132V) U = SPM-58E (29V/2.0A, 0.15W stand by, 100-240V)
	Plug	1 = EU 2 = US, SPT-2	3 = AU 4 = UK	5 = JP
	Fixiation Type	1 = Standard screw fixiation	2 = Quick Release	
	Cable Length (mm)	1 = Straight, 1500	2 = Straight, 2000	3 = Straight, 4000
	Control Board	2 = With MCU		
	Bluetooth Built-In	0 = Without	1 = With	
	t-touch Built-In	0 = Without	1 = With	
	TBB Port	0 = Without	1 = With	

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.
TiMOTION products are subject to change without prior notice.