

TL3

series



Product Segments

- **Care Motion**
- **Comfort Motion**
- **Ergo Motion**
- **Industrial Motion**


The TL3 columns from TiMOTION are made up of three extruded aluminum tubes of rectangular shape that give the system great stability and a high stroke with reduced retracted length. This electric lifting column allows for an easy integration into many height adjustable workstation applications, such as an exam chair in healthcare industry.

General Features

Max. load	4,000N (push)
Self-locking force	4,000N
Max. dynamic bending moment	1,000Nm
Max. static bending moment	2,000Nm
Max. speed at max. load	13.7mm/s
Max. speed at no load	45.5mm/s
Retracted length	≥ Stroke/2 + 150mm ≥ Stroke/2 + 220mm
IP rating	IPX6
Dimension of outer tube	177.4*150.7mm rectangular
Stages	3-stage
Stroke	250~1200mm
Certificate	IEC60601-1, EMC
Output signals	POT, Hall sensor * 2
Options	Direct cut system
Voltage	12V DC; 24V DC (thermal control)
Color	Black, matte silver
Operational temperature range	+5°C~+45°C

Drawing

Standard Dimensions
(mm)

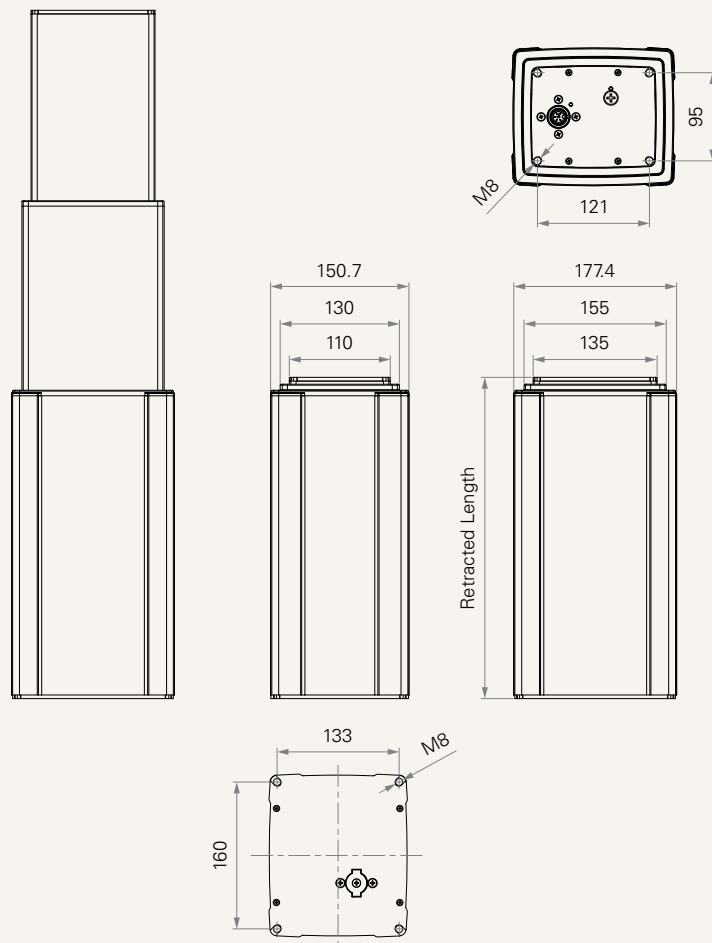

Load and Speed


CODE	Load (N)	Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push		No Load 32V DC	With Load 24V DC	No Load 32V DC	With Load 24V DC
Motor Speed (2200RPM, Duty Cycle 10%)						
B	4000	4000	2.5	5.0	14.5	7.6
C	2000	2000	2.5	4.0	22.0	13.0
D	1000	1000	2.5	3.5	39.0	24.0
Motor Speed (2800RPM, Duty Cycle 10%)						
E	4000	4000	3.5	6.0	18.5	9.4
F	2000	2000	3.5	6.4	35.0	20.0
Motor Speed (3800RPM, Duty Cycle 10%)						
G	4000	4000	4.0	10.4	28.0	13.7
H	2000	2000	3.5	7.5	45.5	26.5

Note

- Parameters above are from tested average, please refer to approval drawing for final value.
- The current & speed in table are tested with 24V DC motor. With a 12V DC motor, the current is approximately twice the current measured in 24V DC; speed will be similar for both voltages.
- This self-locking force level is reached only when a short circuit is applied on the terminals of the motor. All the TiMOTION control boxes have this feature built-in.
- Bending moment Y direction = $X \times 0.8$
- Static bending moment = dynamic $\times 2$

Dynamic bending moment (Nm)- X direction

Stroke (mm)	S/2+150	S/2+220
100-300	700	1000
301-500	500	800
501-700	300	500
701-1200	200	200




← Bending moment X

↑ Bending moment Y


Performance Data (24V DC Motor)

Motor Speed (2200RPM, Duty cycle 10%)

Speed vs. Load

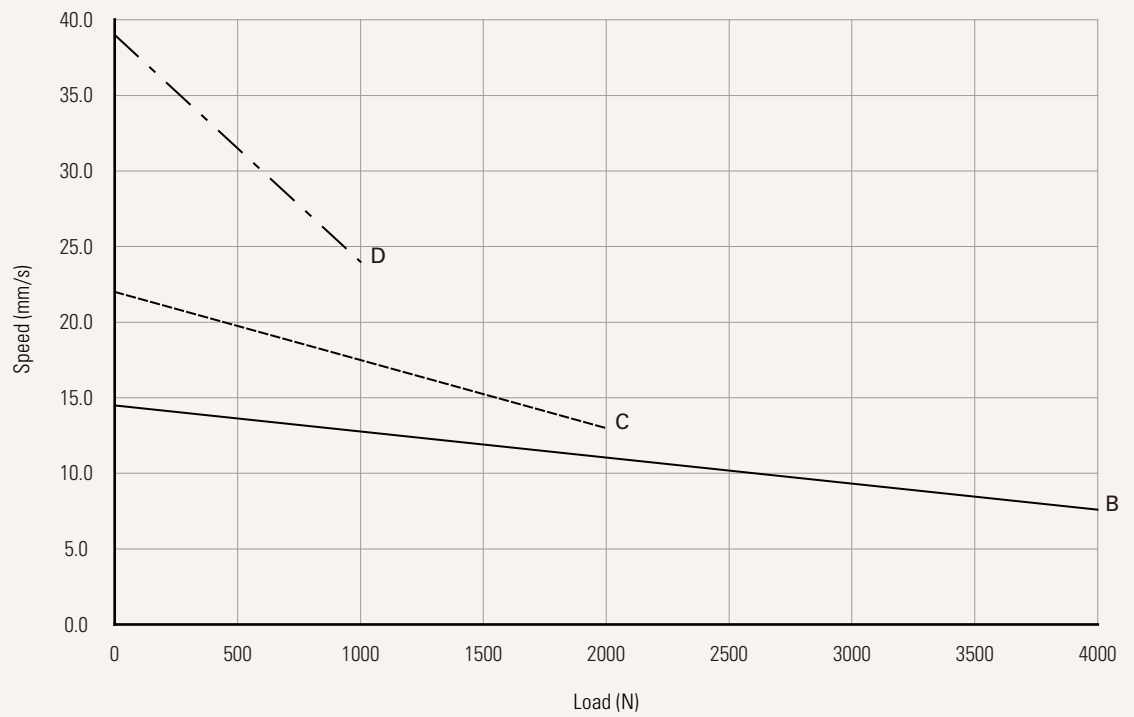


Current vs. Load

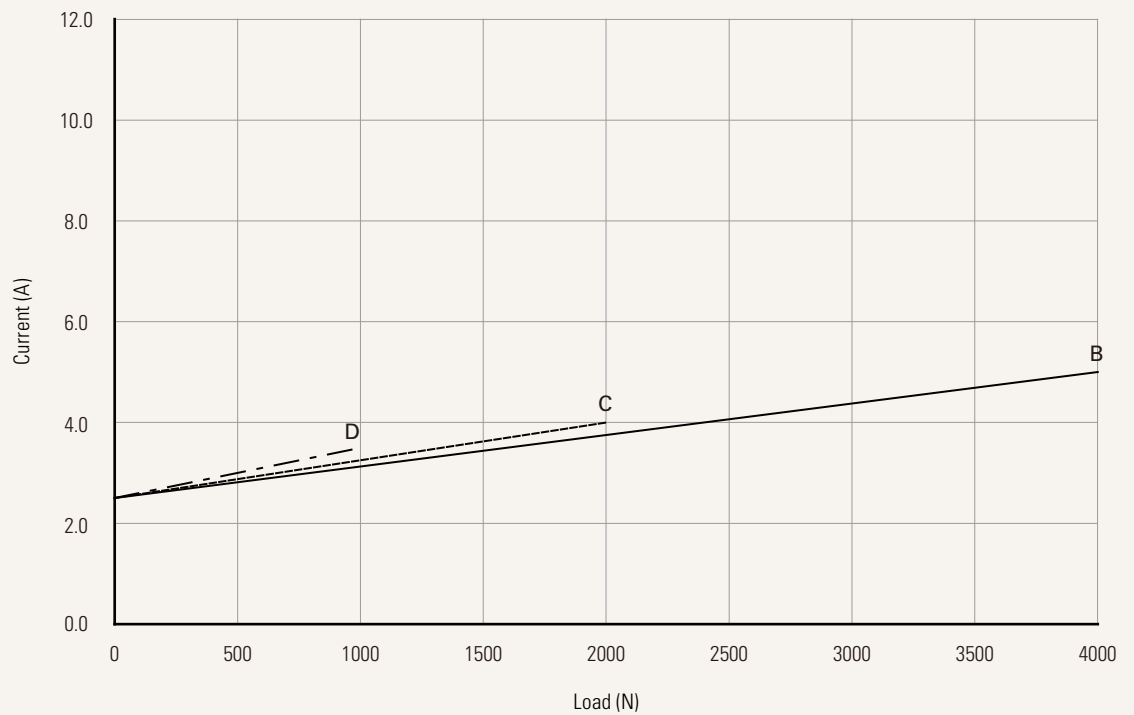


Performance Data (24V DC Motor)

Motor Speed (2800RPM, Duty cycle 10%)

Speed vs. Load

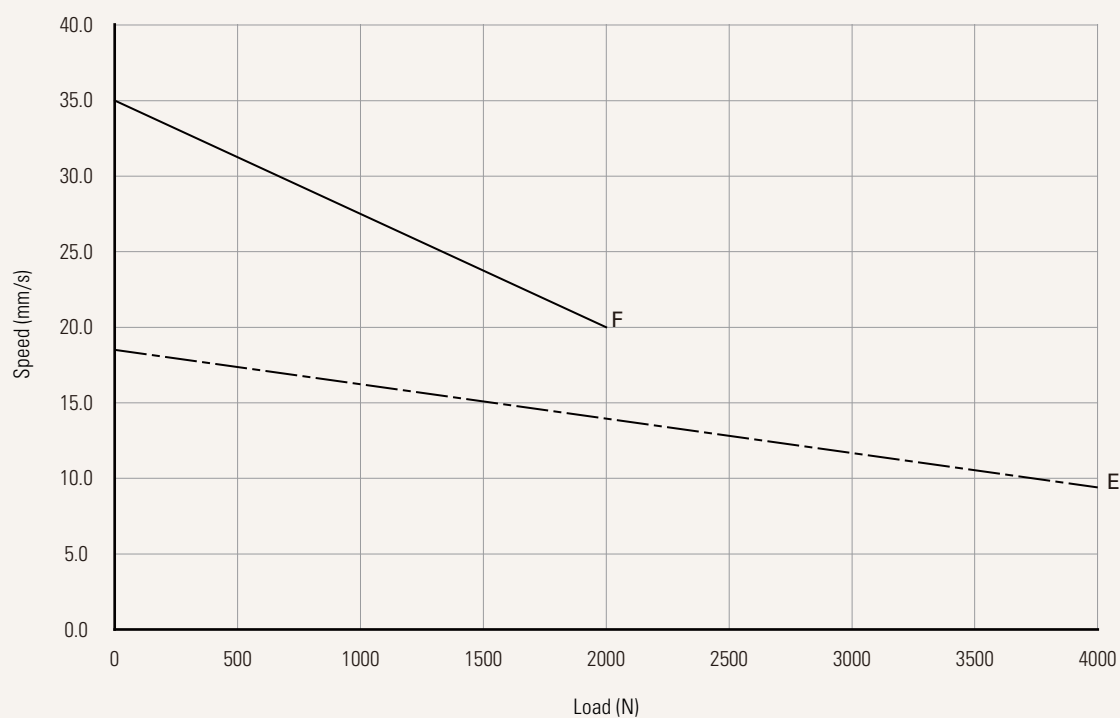


Current vs. Load

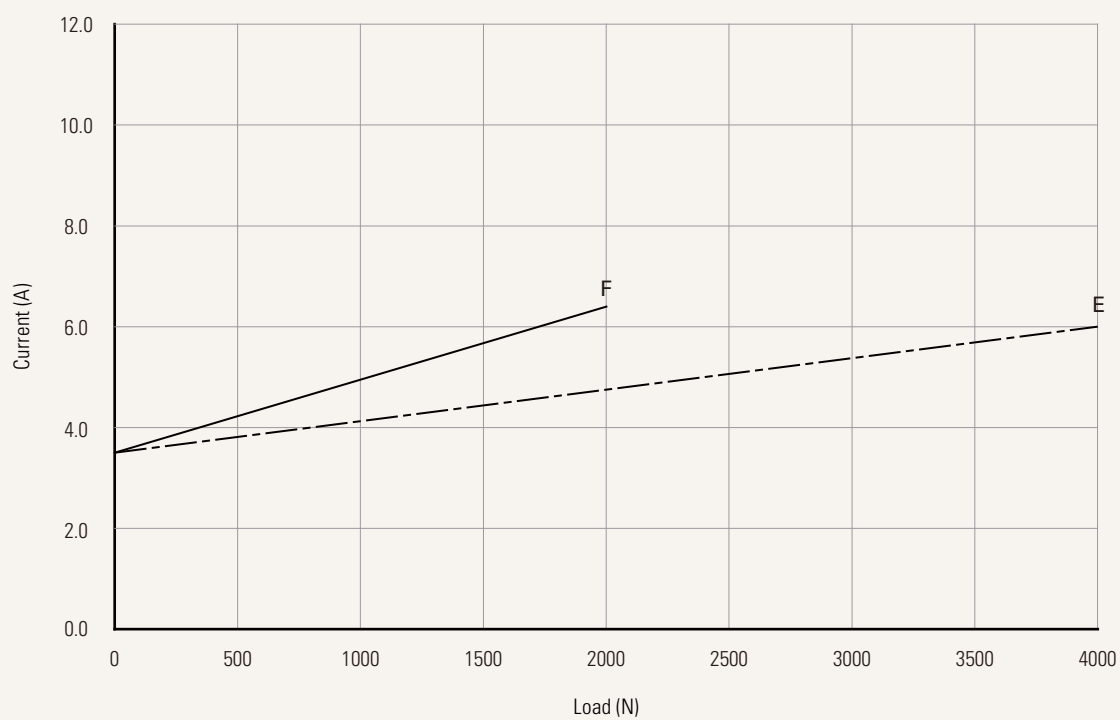


Performance Data (24V DC Motor)

Motor Speed (3800RPM, Duty cycle 10%)

Speed vs. Load

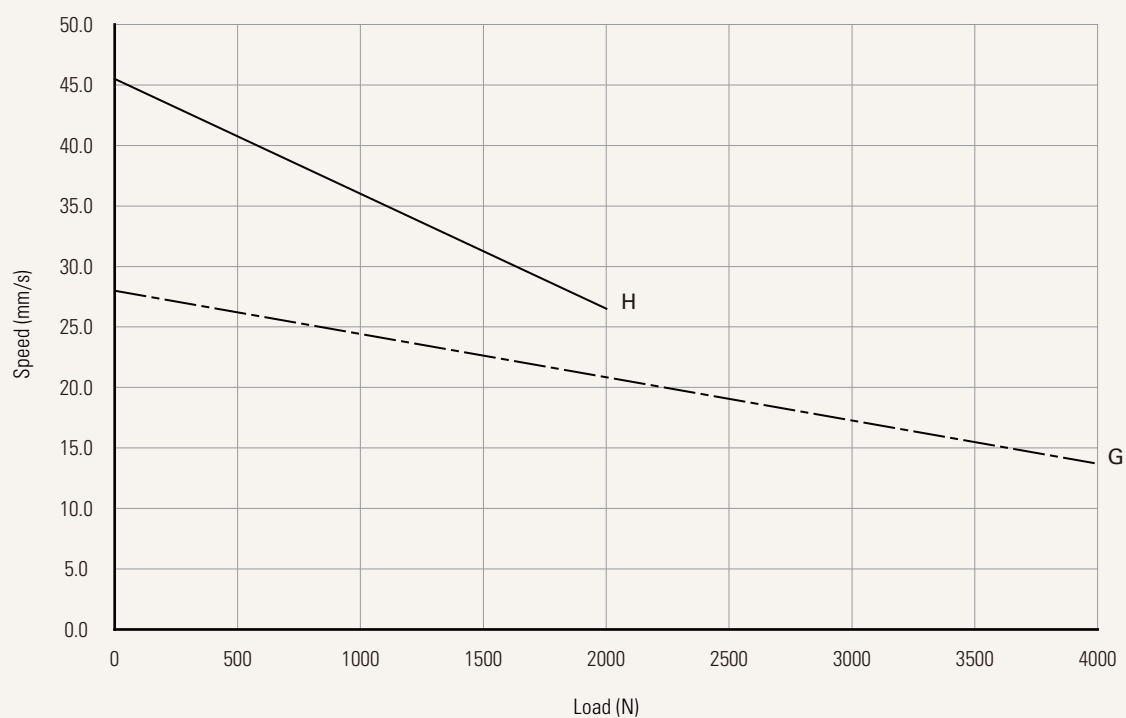

Current vs. Load

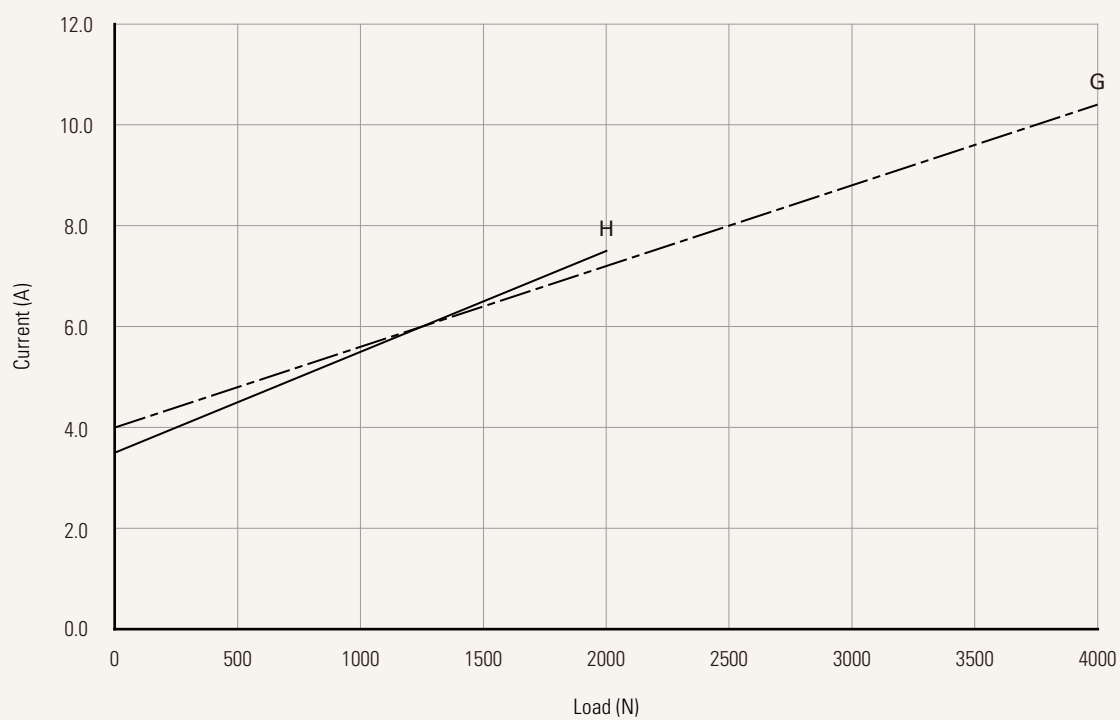

TL3 Ordering Key - Top End Socket

TL3

Version: 20260622-AA



Voltage	1 = 12V DC	5 = 24V DC, thermal control
Load and Speed	See page 3	
Stroke (mm)	250~1200	
Retracted Length (mm)	See page 10	
Cable Exit See page 10	1 = Top end socket	
Special Functions for Spindle Sub-assembly	0 = Without (Standard)	1 = Safety nut
Functions for Limit Switches See page 11	1 = Two switches at full retracted / extended positions to cut current 3 = Two switches at full retracted / extended positions to send signal	
IP Rating	1 = Without	2 = IPX4 3 = IPX6
Output Signals	0 = Without	2 = Hall sensors * 2 3 = POT
Connector See page 11	1 = DIN 6P, socket	2 = DIN 6P, socket, with Anti-pull buckle
Cable Length (mm)	0 = Without (The corresponding extension cable TEC needs to be ordered separately*) Note: please contact TiMOTION before making an order	
Color	1 = Black	2 = Matte silver
Tubes Direction See page 12	0 = Thinner on top	
Grounding Function	0 = Without	1 = With

Note

¹ The TL3 is designed especially for push applications, not suitable for pull applications.

TL3 Ordering Key - Side Cable

TL3

Version: 20260622-AA



Voltage	1 = 12V DC	5 = 24V DC, thermal control	
Load and Speed	See page 3		
Stroke (mm)	250~1200		
Retracted Length (mm)	See page 10		
Cable Exit See page 10	2 = Bottom side cable	3 = Top side cable	4 = Top (to TC) + Bottom (to TH) side cable
Special Functions for Spindle Sub-assembly	0 = Without (Standard)	1 = Safety nut	
Functions for Limit Switches See page 11	1 = Two switches at full retracted / extended positions to cut current 3 = Two switches at full retracted / extended positions to send signal		
IP Rating	1 = Without	2 = IPX4	3 = IPX6
Output Signals	0 = Without	2 = Hall sensors * 2	3 = POT
Connector See page 11	1 = DIN 6P, 90° plug 2 = Tinned leads	3 = Molex 6P, 90° plug F = DIN 6P, 180° plug	G = Molex 8P 90° plug H = Molex 8P 180° plug
Cable Length (mm)	1 = Straight, 500 2 = Straight, 750	3 = Straight, 1000 4 = Straight, 1250	5 = Straight, 1500 6 = Straight, 1750 7 = Straight, 2000
Color	1 = Black (Black cable set) 2 = Silver (428C color cable set)	3 = Silver (Black cable set)	
Tubes Direction See page 12	0 = Thinner on top	1 = Wider on top	Note: If "top+bottom cable" in Cable Exit section is selected , could only select #0
Grounding Function	0 = Without	1 = With	

Note

¹ The TL3 is designed especially for push applications, not suitable for pull applications.

TL3 Ordering Key - Direct Cut

TL3

Version: 20260622-AA



Voltage 5 = 24V DC, thermal protector



Load and Speed [See page 3](#)



Stroke (mm) 250~1200



Retracted Length (mm) [See page 10](#)



Cable Exit
[See page 10](#)
 B = Top side - for TH; Bottom side - for TP
 C = Bottom side - Y cable, for TH + TP
 D = Top side - for the 2nd column; Bottom side - for TH & TP; direct cut operation with 2 columns
 E = Top side - for the 2nd column & TH; Bottom side - for TP; direct cut operation with 2 columns



Special Functions for Spindle Sub-assembly
 0 = Without (Standard) 1 = Safety nut



Functions for Limit Switches
[See page 11](#)
 1 = Two switches at full retracted / extended positions to cut current



IP Rating 1 = Without 2 = IPX4 3 = IPX6



Output Signals 0 = Without



Connector
[See page 11](#)
 C = Direct cut, water proof, anti-pull



Cable Length (mm)
[See page 12](#)
 B = Cable exit #B, L2 = L3 = 100 D = Cable exit #D, L2 = L3 = L4 = 100
 C = Cable exit #C, L1 = L2 = L3 = 100 E = Cable exit #E, L2 = L3 = L4 = 100



Color
 1 = Black (With black cable set) 3 = Matte silver (With black cable set)
 2 = Matte silver (With 428C color cable set)



Tubes Direction
[See page 12](#)
 0 = Thinner on top 1 = Wider on top



Grounding Function 0 = Without 1 = With

Note

¹ The TL3 is designed especially for push applications, not suitable for pull applications.

Retracted Length (mm)

1. Minimum retracted length needs to $\geq A+B+C$

A. Load (N)	1000	2000	4000
	Stroke / 2+150 or Stroke / 2+220		

Note

1 Different retracted length is relative to different bending moment, [See page 3.](#)

B. Cable Exit

CODE	Top End Socket	Bottom Side Cable	Top Side Cable	Top + Bottom side cable	Direct Cut
1	-	-	-	-	-
2	-	-	-	-	-
3	-	-	+15	-	-
B	-	-	-	+35	-
B, D, E	-	-	-	-	+35
C	-	-	-	-	-

C. When with POT (When without POT, C = 0)


Cable Exit Code	Top End Socket	Bottom Side Cable	Top Side Cable
1	+40	-	-
2	-	+40	-
3	-	-	+40

Note



1 If met $S > 700\text{mm}$ & $RL = S/2 + 150$ & Bottom side cable conditions at the same time, the minimum retracted length needs to $\geq 20\text{mm}$.

Cable Exit



1 = Top end socket




2 = Bottom side cable



3 = Top side cable




4 = Top (to TC) + Bottom (to TH) side cable




Cable Exit


B = Top side - for TH; Bottom side - for TP




C = Bottom side - Y cable, for TH + TP



D = Top side - for the 2nd column; Bottom side - for TH & TP; direct cut operation with 2 columns



E = Top side - for the 2nd column & TH; Bottom side - for TP; direct cut operation with 2 columns




Functions for Limit Switches

Wire Definitions


CODE	Pin					
	1 (Green)	2 (Red)	3 (White)	4 (Black)	5 (Yellow)	6 (Blue)
1	extend (VDC+)	N/A	N/A	N/A	retract (VDC+)	N/A
3	extend (VDC+)	common	upper limit switch	N/A	retract (VDC+)	lower limit switch

Connector


1 = DIN 6P, socket (Top end socket)



1 = DIN 6P, 90° plug (Side cable)




2 = Tinned leads




2 = DIN 6P, socket, with Anti-pull buckle




3 = Molex 6P, 90° plug




F = DIN 6P, 180° plug




G = Molex 8P 90° plug



H = Molex 8P 180° plug



C = Direct cut, water proof, anti-pull



For TH:
long DIN 5P (Pin array 240°),
180° socket (with anti-pull clip)




For TP:
long DIN 5P (Pin array 240°),
180° plug (with O-ring)




For Column 2:
long DIN 6P (Pin array 240°),
180° plug (with anti-pull clip)

Cable Length (mm)

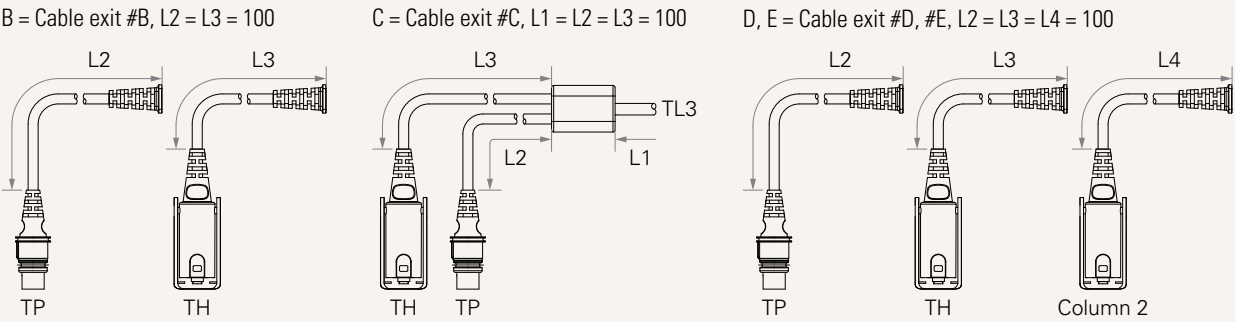

Tubes Direction

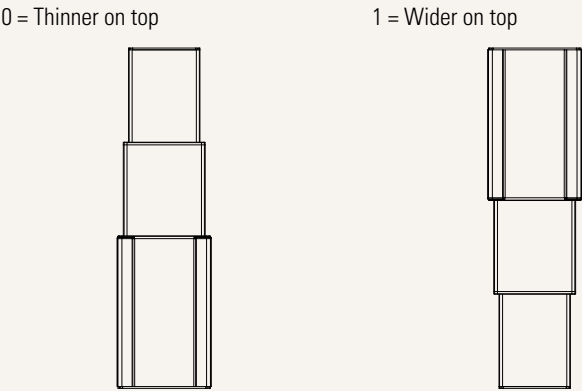

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.