

# **TH11**

## series



### **Product Segments**

## Comfort Motion

#### **General Features**

LED indicator

Number of motors
Max. available buttons
Color
Options


6 Black, grey Safety key

1~3

## TH11 Series

#### Drawing

Standard Dimensions (mm)

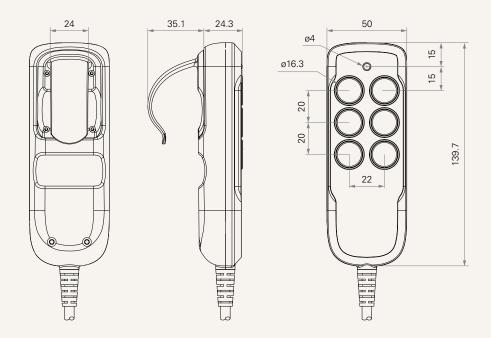



# **TH11** Ordering Key



TH11


Version: 20150104-I

|   |  | 3 = 3   |  |  |
|---|--|---|--|--|
| 1 = DIN 5P, for TDC<br>2 = DIN 8P, for TC2 / TC3 / TC7  |  | 4 = DIN 8P, 180°, for extension cable<br>5 = RJ 10P, 180°, for TC6 / TC9 extension cable  |  |  |
| 1 = Black 2 = Pantone 428C  Note: Standard is (Pantone 428C), including upper and lower case; if there's specific request, it needs to specify. |  |   |  |  |
| 0 = Without   | 1 = With   |   |  |  |
| 1 = Standard  | 2 = Magnetic   |   |  |  |
| 01~27 = See appendix (need work with MCU option #0) *   |  |   |  |  |
| Note: please contact TiMOTION before making an order  |  |   |  |  |
| •   |  |   |  |  |
|   | 2 = DIN 8P, for TC2 /  1 = Black Note: Standard is (Pa  0 = Without  1 = Standard  01~27 = See appending Note: please contact  1~2 = See appendix* | 2 = DIN 8P, for TC2 / TC3 / TC7  1 = Black 2 = Pantone 428C Note: Standard is (Pantone 428C), including upper  0 = Without 1 = With  1 = Standard 2 = Magnetic  01~27 = See appendix (need work with MCU option |  |  |

## **TH11** Ordering Key Appendix



#### **Cable Length**



| Cable Section (mm) |      |     |     |      |  |
|--------------------|------|-----|-----|------|--|
| CODE               | Α    | В   | С   | L    |  |
| 1                  | -    | -   | -   | 1500 |  |
| 2                  | 1000 | 200 | 200 | -    |  |



#### **Terms of Use**