

TMH1

series



Product Segments




- **Care Motion**

General Features

Connected actuators	1~4
Maximum available buttons	10
Color	Grey
IP rating	Up to IP66
With safety key, hook, and flash light	
Compatible with TNC series, used as a nurse calling system	


Drawing

Standard Dimensions
(mm)

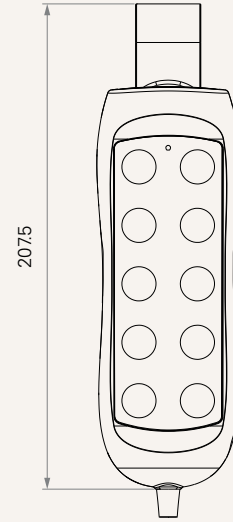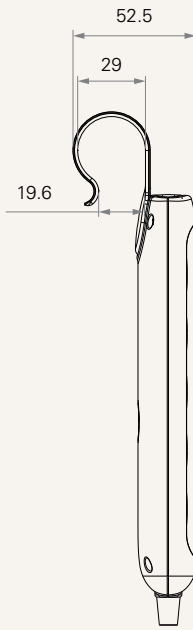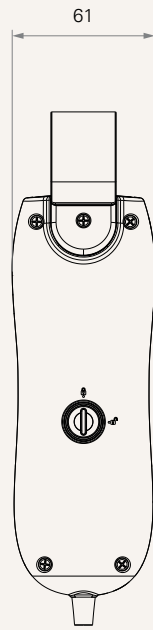

Built-in MCU	0 = Without	1 = With		
Compatible Control Box Type	0 = Without MCU	1 = With MCU		
Actuator Channels	1 = 1	2 = 2	3 = 3	4 = 4
Buttons Definition	01 = See appendix* Note: please contact TiMOTION before making an order			
Flash Light	1 = With			
Safety Lock	1 = " - " Type1		2 = "▲" Type2, with safety key	
Connector Type	3 = DIN 8pin	4 = RJ 10pin		
Connector Angle	1 = 90°	2 = 180°		
Cable Length (mm)	1~6 = See page 4			
Color	4 = Standard (Cover 428C, safety key & hook 285C)			
Hook	1 = Type 1, standard			
IP Rating	2 = IP54	3 = IP66		

Cable Length

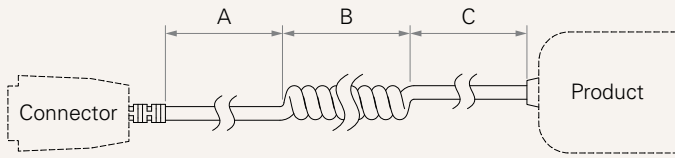

Cable Section (mm)			
CODE	A	B	C
1	1000	300	200
2	1200	300	300
3	1400	300	400
4	2400	0	0
5	0	600	0
6	1000	200	200

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.