


TBS1

series

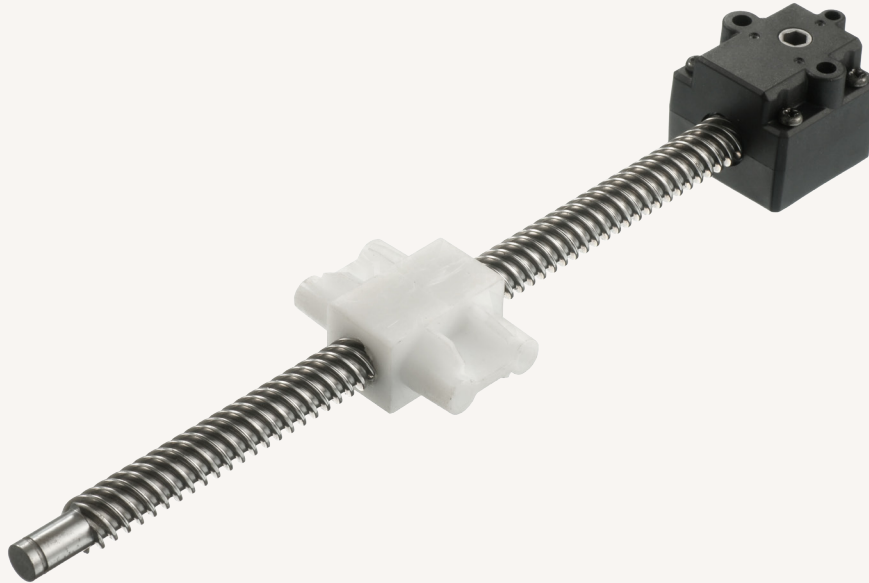

Product Segments

- **Ergo Motion**

General Features


Maximum load	1,000N
Recommended stroke	20~600mm
Minimum dimensions	stroke+110mm
Especially designed for TGM series	

Load and Speed

CODE	Rated Load (N)	The Torque Force of Rated Load (Nm)
A	1000	4.6
B	1000	5.4

Drawing

Standard Dimensions
(mm)

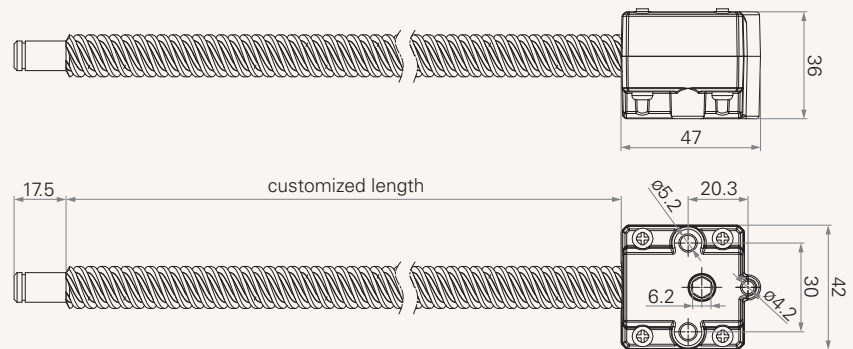

TBS1

Version: 20150311-C

<input type="text"/>	Load and Speed	See page 2.	
<input type="text"/>	Stroke	Note : suggested stroke is 20-600mm	
<input type="text"/>			
<input type="text"/>			
<input type="text"/>	Retracted Length	Stroke+110mm Note : enter 000 , when choosing #0 in inner tube (without inner tube)	
<input type="text"/>			
<input type="text"/>			
<input type="text"/>	Drive Shaft Hole on Gearbox	1 = HEX, 6mm	
<input type="text"/>	NUT	0 = Without	1 = With
<input type="text"/>	Inner Tube	0 = Without (NUT is the fixation component)	1 = 22*22 square inner tube
<input type="text"/>	Front Attachment	1 = Plastic	2 = Metal

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.