

TBS2

series



Product Segments

- **Ergo Motion**


General Features

Recommended stroke	50~800mm
Minimum dimensions	stroke/2+115mm
Maximum load	1,000N

TBS2 series are for the three part columns, except for TL3/TL5/TL6

Drawing

Standard Dimension
(mm)

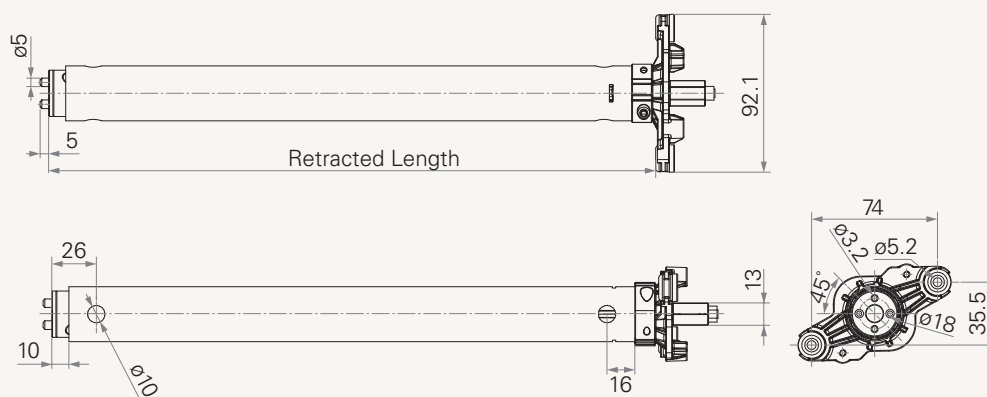

Load and Speed

CODE	Rated load (N)	Lead (mm/turn)
A	1000	RPM*20/60
B	1000	RPM*9.2/60

TBS2

Version: 20140310-A

<input type="checkbox"/>	Load and Speed	See appendix		
<input type="checkbox"/>	Stroke	Recommended stroke: 50~800mm		
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>	Retracted Length	Stroke/2 + 115mm		
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>	Drive Shaft Type	1 = HEX, 13mm	2 = TiMOTION drive shaft	A = Customized
<input type="checkbox"/>	Fixation of Mid-tube	0 = Without 1 = Hole, Ø10mm	2 = Fixing base for mid-tube A = Customized	
<input type="checkbox"/>	Front Attachment	0 = Punch hole on inner tube Ø10mm, without front attachment 1 = Plastic front attachment	2 = Metal front attachment A = Customized	

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.

Due to continuous development in order to improve our products, TiMOTION products are subject to frequent modifications and changes without prior notice.

TiMOTION reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by TiMOTION.