

# TBS3

series



---

## Product Segments

- **Ergo Motion**


---

## General Features

Recommended stroke	20~600mm
Minimum dimensions	stroke+80mm
Maximum load	1,000N
TBS3 series are for the two part columns	

**Drawing**

Standard Dimension  
(mm)

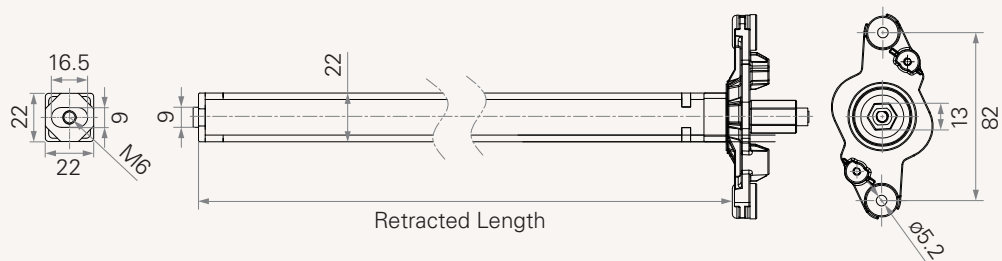

**Load and Speed**

CODE	Rated load (N)	The torque force of rated load (Nm)	Typical speed (mm/revolution)
A	1000	4.6	16
B	1000	5.4	12

## TBS3

Version: 20150311-C

<input type="checkbox"/>	<b>Load and Speed</b>	See appendix		
<input type="checkbox"/>	<b>Stroke</b>	Recommended stroke: 20-600mm		
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>	<b>Retracted Length</b>	Stroke+80mm		
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>	<b>Drive Shaft Type</b>	1 = HEX, 13mm	2 = TiMOTION drive shaft	A = Customized
<input type="checkbox"/>	<b>Inner Tube Type</b>	0 = Without (fixed on the nut)	1 = 22*22 square inner tube	A = Customized
<input type="checkbox"/>	<b>Front Attachment</b>	1 = Plastic	2 = Metallic	A = Customized

### Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.

Due to continuous development in order to improve our products, TiMOTION products are subject to frequent modifications and changes without prior notice.

TiMOTION reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by TiMOTION.