TEK22

series

Product Segments

Ergo Motion

General Features

Max. load 120kg

3-Stage Column: 38mm/s Constant speed

2-Stage Column: 31mm/s

Frame orientation Rectangular Weight of package 33~40Kg* < 0.1W Standby power

USB Chargers, TFA1/3 Accessories

> Anti-Collision Sensor, TCS1 Wireless Chargers, TWC

Multiple column and control options

High strength and stability – Steel construction

Pre-assembled frame kit – Significantly reduces installation time

*It varies upon the selection of components.

Color (RAL Classic)

RAL9005

RAL9006



RAL9016



RAL9022















Drawing

Dimensions




Frame dimensions (mm)	Recommended work surface dimensions (mm)			
Width (mm)	Width (mm)	Depth (mm)		
1050~1700	1100~1800	700~1000		



Column Type	Frame Height (mm)	Stroke (mm)	Stroke (mm)	
3-Stage	630~1280	650		
3-Stage (M)	600~1260	660	660	
3-Stage (S)*	560~1220	660		
2-Stage	680~1180	500		



Foot (mm)

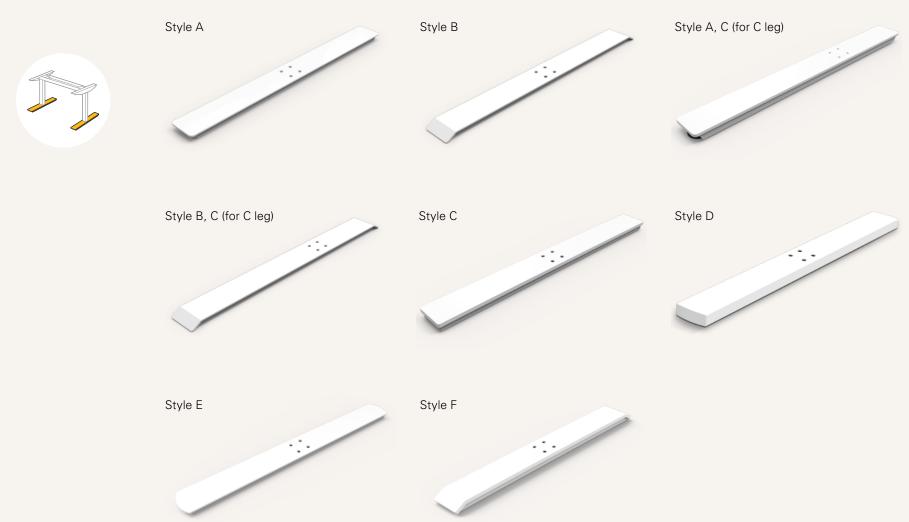

Foot (mm)



Code	Style	Thickness (mm)	Length (mm)	Code	Style	Thickness (mm)	Length (mm)
0	-	Without	-	N	А	8	680
1	А	8	750	P	С	Aluminum extrusion	600
2	А	5	750	V	Е	5	750
3	В	5	750	Z	F	Alu slanted	680
4	В	8	750				
6	С	Aluminum extrusion	750	5	А	8	750
7	D	Tube	750	E	А	8	680
8	А	5	550	J	В	8	680
9	А	5	680	K	В	8	750
С	А	8	550	Q	А	5	580
D	С	Aluminum extrusion	550	R	А	5	600
F	В	5	550	S	А	5	750
G	В	5	680	Т	В	5	580
Н	В	8	550	U	А	8	550
L	D	Tube	550	w	В	5	680
M	А	5	600	Υ	В	5	750

End Pipes



Style A (Fixation holes for tabletop)



Style A1 (Fixation holes for tabletop)



*Style A1 is only compatible with TLxS series

Style B, C for C-leg (Fixation holes for tabletop)



TL Model

• 3-Stage











TL4S Square 70 x 70 mm

Rectangular 90 x 60 mm

Rectangular 83 x 53 mm

TL33SR Rectangular 83 x 53 mm

• 2-Stage







Rectangular 90 x 60 mm



TL32S Rectangular 83 x 53 mm



TL32SR Rectangular 76 x 46 mm

Hand Control



Hand Control



M = TDH5PR



N = TDH13P



P = TDH15



Q = TDH18P



R = TDH17



S = TDH20P



T = TDH9P

Accessories (optional)



TCS1

TCS1 is a collision sensor based on t-touch technology which does not require any additional hardware upgrades.



TFA1

A charger with 2 USB ports.

Can be mounted on the table top.



TFA3

A charger with 2 USB ports.

Can be mounted to the desk front side.



TWC

Designed for wireless charging of mobile devices.

Can be mounted on the table top.



TEK22 Ordering Key



TEK22

								Version: 20200827-D	
TL Model	004S = TL4S	013S = TL13S	030S = TL30S	031S = TL31S	032S = TL32S	033S = TL33S	33SR = TL33SR	32SR = TL32SR	
See page 5									
Foot (mm)	See page 3-4								
Color	1 = Black (RAL 9005) 3 = White (RAL 9016)			116)	6 = Matte Black (RAL7021)				
	2 = Grey (RAL 900	06)	4 = Special grey (F	RAL 9022)	7 = Graphite grey ((RAL7024)			
TC	0 = Without	3 = TC15S							
Hand Control	0 = Without	4 = TDH2	8 = TDH6	D = TDH8P	H = TDH12P	N = TDH13P	S = TDH20P		
See page 6-7	1 = TH37	5 = TDH3	9 = TFH13	E = TDH8	K = TDH16	P = TDH15	T = TDH9P		
	2 = TFH8	6 = TDH4	B = TH14	F = TDH8D	L = TDH6PR	Q = TDH18P			
	3 = TDH1	7 = TDH5	C = TFH21	G = TDH11P	M = TDH5PR	R = TDH17			
End Pipe (mm)	1 = Style A, fixation	on holes, fixed with oute	r pipe, E1 & E2: 550		3 = Style A1, fixation holes, fixed with motor house, E1 & E2: 360				
See page 4	2 = Style A1, fixation holes, fixed with motor house, E1 & E2: 550			7 = Style B, fixation holes, fixed with outer pipe, E1 & E2: 580, for C-leg					
Desk Frame (mm)	1 = Normal, outer pipe 25*40, W: 1050-1700								
Assembly Manual	0 = Without				3 = Chinese, No logo, Black/White printing				
	C = Chinese, TiMOTION logo, Black/White printing				4 = English, No logo, Black/White printing				
	E = English, TiMOTION logo, Black/White printing				5 = Chinese, No logo, colour printing				
	1 = Chinese, TiMO	OTION logo, colour printi	ng		6 = English, No logo, colour printing				
	2 = English, TiMO	TION logo, colour printin	g						

Terms of Use